


65" | 75" | 86"

# Smart Board® GX High Secure

Interactief display

SMART  
BOARD  
.NL

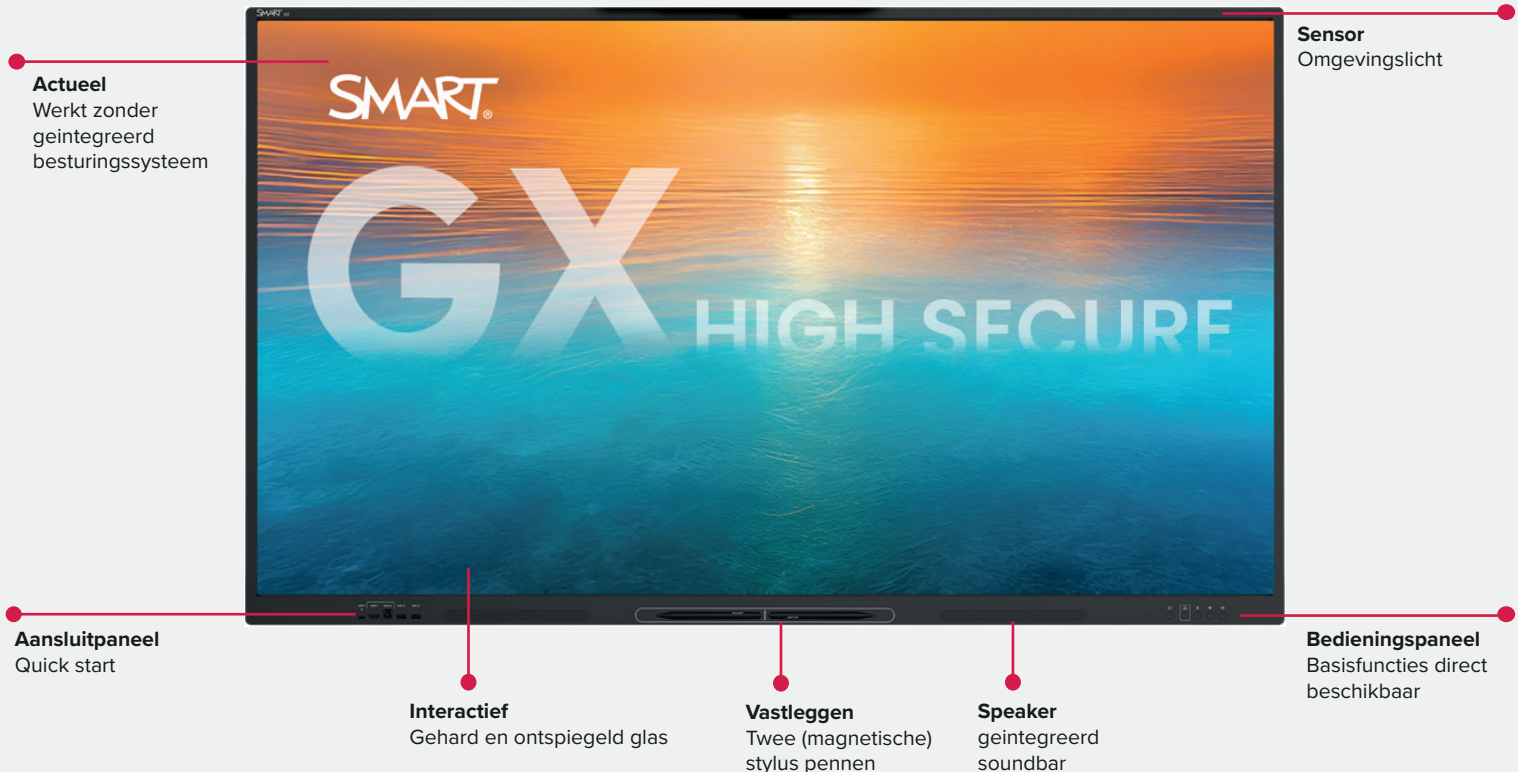

- ✓ Zonder OS, Wi-Fi, BlueTooth
- ✓ LAN In - en uitgang
- ✓ Robuust design
- ✓ Full featured USB-C met power delivery

- ✓ HDMI 2.0 Ultra HD 4K 60Hz
- ✓ 2 x 20 Watt stereo soundbar
- ✓ OPS computer slot
- ✓ Zero bonded glass technologie

## Uw SMART Board ophangen

### Montage opties

Bekijk alle montage opties op [smartboard.nl/shop](https://smartboard.nl/shop)

#### VERIJDBAAR ONDERSTEL



- ✓ Grijs, zwart of wit
- ✓ Elektrisch in hoogte verstelbaar

#### DESIGN WAND/VLOERLIFT



- ✓ Luxe uitstraling
- ✓ Elektrisch in hoogte verstelbaar

## Uw SMART Board uitbreiden

### Accessoires

Bekijk alle accessoires op [smartboard.nl/shop](https://smartboard.nl/shop)

#### VIDEOBARS



- ✓ O.a Teams, Zoom en Meet
- ✓ Maak hybride overleg mogelijk

#### WINDOWS SLOT-IN PC



- ✓ Intel core i5 of i7 processor
- ✓ Windows 11 PRO

# Specificaties



Display	
Screen sizes (diagonal)	65"   75"   86"
Backlight	LED
Aspect ratio	16:9
Maximum display resolution	4K UHD (3840 × 2160)
Refresh rate	60 Hz
Lifespan	≥ 50,000 hours
Brightness <sup>1</sup>	400 cd/m <sup>2</sup>
Display response time	≤ 8 ms
Viewing angle	178°
Glass	Full heat-tempered   Anti-glare   Bonded
Frame color	Black
Convenience buttons	Power   Home   Volume   Freeze frame
Sensors	Ambient light   Infrared
Audio	2 integrated 20W speakers with high fidelity audio

Embedded software	
Operating system	Not available

Interactive experience	
Touch technology	Advanced infrared
Touch features	Simultaneous tool differentiation <sup>3</sup> Object Awareness™ <sup>4</sup> Silktouch™
Typical touch response time	≤ 8 ms
Frame rate	≥ 125 Hz
Accuracy	1 mm
Minimum object size	2 mm
Multitouch capabilities	40 – Windows® 20 – Mac 10 – Chrome OS™
Tools included	Pens (x2)
Tool holders	Magnetic   Frame-mounted

Software	
Included	SMART Notebook® SMART Product Drivers and SMART Ink®
Optional	SMART Notebook Plus Lumio™ SMART Meeting Pro® SMART TeamWorks™

Storage and operating requirements	
Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	32–104°F (0–40°C)
Storage temperature	14–140°F (-10–60°C)
Humidity	20–80% relative humidity, non-condensing



## Vragen?

Bel 038 - 420 90 90 of mail [info@smartboard.nl](mailto:info@smartboard.nl)  
[www.smartboard.nl](http://www.smartboard.nl)

Inputs	Front	Back
OPS PC accessory slot	–	1
HDMI® 2.0 with HDCP 1.4 and HDCP 2.2 support	1	2
Display Port 1.2	–	1
VGA video	–	1
Stereo 3.5 mm (variable)	–	1
RS-232 (DB-9 connector)	–	1
RJ45 (LAN IN)	–	1
USB Type-C 4K @ 60Hz Display Port alternate mode, touch, digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 15 W power delivery	1	–
USB Type-C 4K @ 60Hz Display Port alternate mode, touch, digital audio, USB 2.0 Hi-Speed USB	–	1
USB 2.0 Type-A	–	1
USB 3.2 Gen 1 Type-A	2	2
USB 2.0 Type-B	1	1

Outputs	Front	Back
HDMI 2.0 with HDCP 1.4 and 2.2 support	–	1
Stereo 3.5 mm (variable)	–	1
S/PDIF optical (fixed)	–	1
RJ45 (LAN OUT)	–	1

Included cables and accessories	Qty
Country-specific power cable	1
16' 5" (5 m) USB 2.0 A to B cable	1
6' (1.8 m) USB Type-C cable	1
Pens	2
Remote control	1
AAA batteries	2
Illustrated installation instructions	1
Important information document	1

Power consumption	
Typical	65": 79 W
	75": 88 W
	86": 119 W
Standby	<0.5 W

Power consumption	
Typical	65": 79 W
	75": 88 W
	86": 119 W
Standby	<0.5 W

Certification and compliance <sup>5</sup>	
Regulatory models	IDGX65-2   IDGX75-2   IDGX86-2
US / Canada	cULus   FCC   ISED   TSCA   CONEG Packaging   Proposition 65
EU / EEA / EFTA / UK	CE   UKCA   LVD   CB   EMCD   RED   REACH   RoHS   Battery   WEEE   Packaging   POP   Ecodesign
Australia / New Zealand	RCM
Performance standards	ENERGY STAR®   HDMI   HDCP

Purchasing information <sup>6</sup>	
Order numbers	
<b>GX065-V3</b>	SMART Board® GX065-V3 interactive display, no embedded OS
<b>GX075-V3</b>	SMART Board GX075-V3 interactive display, no embedded OS
<b>GX086-V3</b>	SMART Board GX086-V3 interactive display, no embedded OS

**Optional accessories**

See > [smarttech.com/accessories](https://smarttech.com/accessories)

**SMART Warranty**

Terms and conditions and warranty upgrade options vary by region. Visit [smarttech.com/warranty](https://smarttech.com/warranty) or contact your reseller for information.

**Cable requirements**

See > *SMART cables and connectors guide* ([docs.smarttech.com/kb/171926](https://docs.smarttech.com/kb/171926))



## Vragen?

Bel 038 - 420 90 90 of mail [info@smartboard.nl](mailto:info@smartboard.nl)  
[www.smartboard.nl](http://www.smartboard.nl)


## Installation, dimensions, and weights

### Notes

- All dimensions  $\pm 1/8"$  (0.3 cm). All weights  $\pm 2$  lb. (0.9 kg).
- Product ships upright.

### 65" models

#### Dimensions

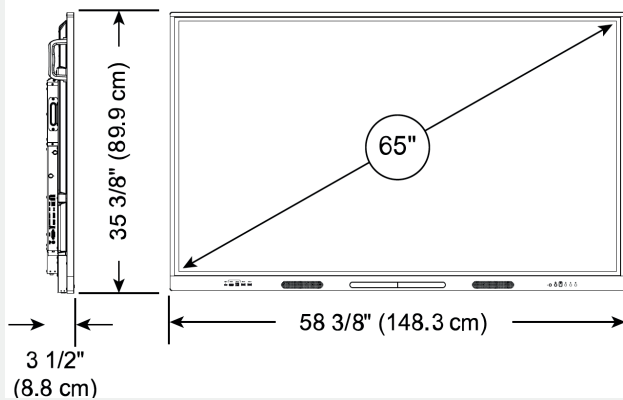

#### Weight

82 lb. (37 kg)

#### Shipping dimensions (including pallet)

63 3/4"  $\times$  45 7/8"  $\times$  6 1/4"  
(162 cm  $\times$  116.5 cm  $\times$  16 cm)

#### Shipping weight

118 lb. (54 kg)

#### VESA mount


M8 | 600  $\times$  400 mm

#### Handles

2

### 75" models

#### Dimensions

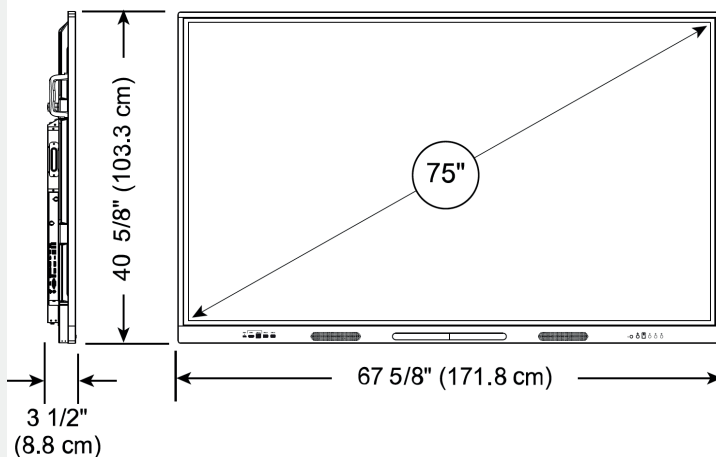

#### Weight

114 lb. (52 kg)

#### Shipping dimensions (including pallet)

71 5/8"  $\times$  50 5/8"  $\times$  6 1/4"  
(182 cm  $\times$  128.5 cm  $\times$  16 cm)

#### Shipping weight

158 lb. (71 kg)

#### VESA mount


M8 | 800  $\times$  400 mm

#### Handles

2

### 86" models

#### Dimensions

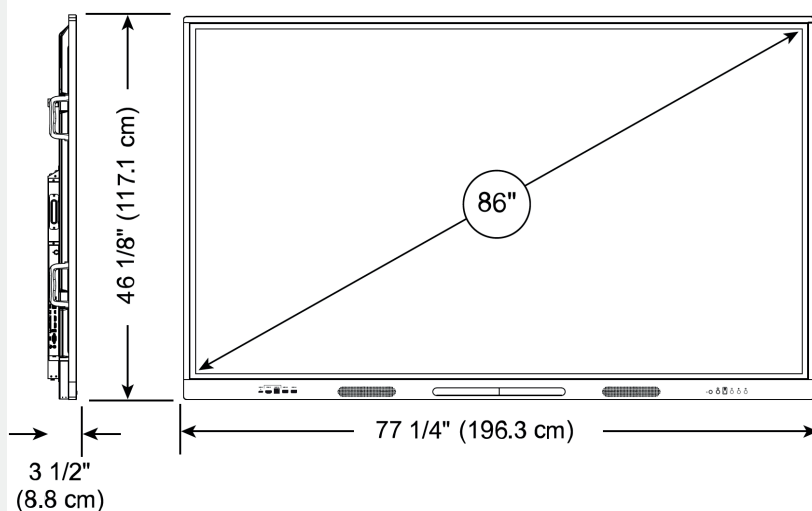

#### Weight

143 lb. (65 kg)

#### Shipping dimensions (including pallet)

85 1/4"  $\times$  56 7/8"  $\times$  6 1/4"  
(216.5 cm  $\times$  144.5 cm  $\times$  16.0 cm)

#### Shipping weight

198 lb. (90 kg)

#### VESA mount

M8 | 800  $\times$  600 mm

#### Handles

4