

43" | 55" | 65"



De vergaderbuddy

Mobiel-inzetbare video-vergaderoplossing



✓ Direct LED-achtergrondverlichting

✓ Beschikbaar in 43, 55 en 65 inch

✓ Laag energieverbruik, milieuvriendelijk

✓ Kabelmanagement

✓ 4K camera | microfoon | soundbar in één

✓ Hoogte verstelbare trolley

✓ Mobiel inzetbaar

✓ Natuurlijker vergaderen



De vergaderbuddy

All-in-one videobar, meekijkscherm en trolley

ALL-IN-ONE VIDEOBAR



- ✓ Luxe videoconference bar
- ✓ Camera met volgtechniek
- ✓ Stel zelf camera presets in
- ✓ Richtmicrofoon met noise cancelling
- ✓ Speciale bevestigingsbeugel

MEEKIJSCHERM



- ✓ Kies voor 43" (full HD), 55" of 65" (4K)
- ✓ Ervaar beeld en geluid in hoge kwaliteit
- ✓ Natuurlijke vergaderingen: volg lichaamstaal

TROLLY



- ✓ Interne kabelmanagement
- ✓ Hoogteverstelling (midden van het display): 1030 - 1530 mm (elke 50 mm).
- ✓ In hoogte verstelbare AV-plank
- ✓ 4 geremde zwenkwielen
- ✓ Kleur: zwart
- ✓ Mobiel inzetbaar
- ✓ Luxe afwerking

BLUETOOTH TOETSENBOORD



- ✓ Kies voor QWERTY of AZERTY
- ✓ Draadloos toetsenbord

HDMI + USB + ETHERNET IN KABEL HOES



- ✓ 5 meter
- ✓ Ondersteunt 4K UHD resolutie

Specificaties



Meekijkscherm

Kies uit 43, 55 of 65 inch



Meekijkscherm	43 inch	55 inch	65 inch			
Set dimensions (W x H x D)	968.2 x 559.4 x 60.9 mm	1239.2 x 711.6 x 61.71 mm	1458.7 x 834.7 x 81.6 mm			
Panel resolution	1920x1080p	3840x2160	3840 x 2160			
Optimum resolution	1920x1080 @ 60 HZ	3840x 2160 @ 60 HZ	3840x 2160 @ 60 HZ			
Brightness	350 cd/m ²	350 cd/m ²	350 cd/m ²			
Contrast ratio (typical)	3000:1	4000:1	4000:1			
Dynamic contrast ratio	500,000:1	500,000:1	500,000:1			
Response time (typical)	6.5 ms	8 ms	8 ms			
Aspect ratio	16:9	16:9	16:9			
Viewing angle (H / V)	178 / 178 degree	170 / 178 degree	170 / 178 degree			
Pixel pitch	0.49 x 0.49 mm	0.135 x 0.135 mm	0.372 x 0.372 mm			
Display colors	16,7 Million	1.07 Billion	1.07 Billion			
Supported Display Resolutions						
Computer formats	3840 x 2160	30Hz	1920 x 1080	60Hz	1920 x 1080	60Hz
Resolution + Refresh rate	1920 x 1080	60Hz	1600 x 1200	60Hz	1680 x 1050	60Hz
	1680 x 1050	60Hz	1440 x 900	60Hz	1680 x 1050	60Hz
	1600 x 1200	60Hz	1280 x 1024	60Hz	1600 x 1200	60Hz
	1440 x 900	60Hz	1280 x 720	60Hz	1440 x 900	60Hz
	1280 x 1024	60Hz	1280 x 800	60Hz	1280 x 1024	60Hz
	1280 x 800	60Hz	1024 x 768	60, 70, 75Hz	1280 x 800	60Hz
	1280 x 720	60Hz	720 x 400	70Hz	1280 x 720	60Hz
	1152 x 870	75Hz	640 x 480	60, 67, 72, 75Hz	1152 x 870	75Hz
	1024 x 768	60, 70, 75Hz	1152 x 870	75Hz	1024 x 768	60, 70, 75Hz
	800 x 600	56, 60, 72, 75Hz	1680 x 1050	60Hz	800 x 600	56, 60, 72, 75Hz
	720 x 400	70Hz	800 x 600	56, 60, 72, 75Hz	720 x 400	60Hz
	640 x 480	60, 67, 72, 75Hz			640 x 480	60, 67, 72, 75Hz
Video formats	1080p	60Hz	3840 x 2160	60Hz	3840 x 2160	60Hz
Resolution + Refresh rate	1080i	60Hz	3840 x 2160	30Hz	3840 x 2160	30Hz
	1080i	50Hz	1080i	60Hz	1080p	60Hz
	720p	60Hz	1080p	60Hz	1080i	60Hz
	576p	50Hz	720p	60Hz	1080i	50Hz
	576i	50Hz	480i	60Hz	720p	60Hz
	480p	60Hz	480p	60Hz	576p	50Hz
	480i	60Hz	1080i	50Hz	576i	50Hz
			576i	50Hz	480p	60Hz
			576p	50Hz	480i	60Hz
Power						
Mains power	100 - 240V~, 50/60Hz		100 ~ 240 VAC		100~240 V~, 50/60 Hz	
Standby power consumption	<0.5 W		<0.5 W		<0.5 W	
Consumption (Max)	110 W		180 W		260 W	
Consumption (Typical)	75 W		140 W		145 W	



VCA®
ISO
9001


NEEM CONTACT MET ONS OP

Bel 038 - 420 90 90 of mail naar sales@limid.nl

 limid.nl | smartboard.nl



Specificaties






Trolley

Neem uw vergaderbuddy overal mee naar toe



Trolley	
Productafmetingen	71.6 x 84.5 x 174 cm
Gewicht	22.82 kg
Kleur	Zwart
Av-plank	Tot 4,5 kg belastbaar In hoogte verstelbaar
Hoogteverstelling	1030 - 1530 mm (elke 50 mm)
Materiaal	Staal
Garantie	2 jaar
Aanbevolen beeldschermgrootte	32 - 65 inch
Draagvermogen van de tv-adaptor	max. 45,5 kg

Tekeningen

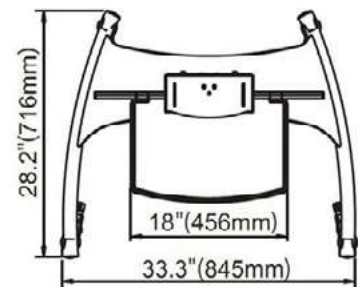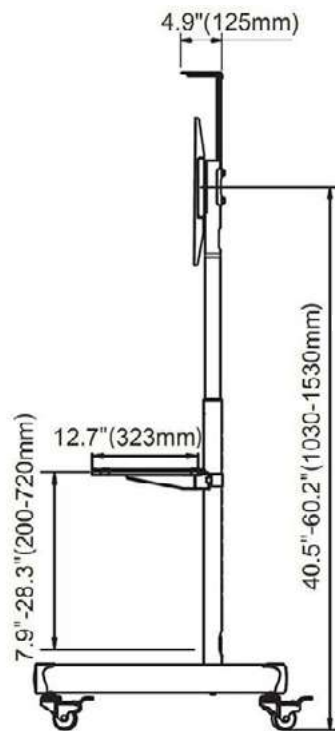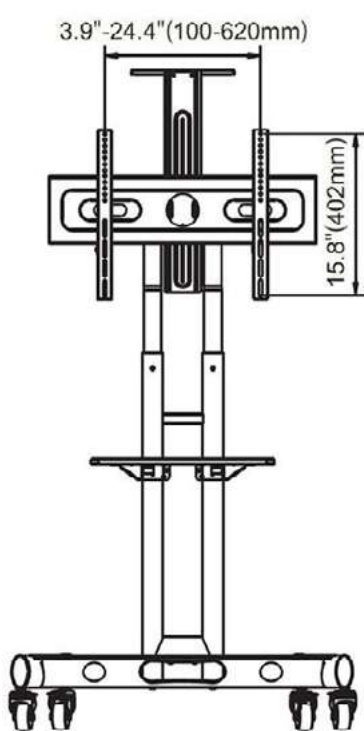

VCA®
ISO
9001

NEEM CONTACT MET ONS OP

Bel 038 - 420 90 90 of mail naar sales@limid.nl

 limid.nl | smartboard.nl

SMART
PLATINUM
PARTNER



Specificaties



All-in-one videobar

4K camera | soundbar | microphone



All-in-one videobar	
Unit dimensions (W x H x D)	105 mm x 700 mm x 70 mm
Weight	2.3 kg
Afstandbediening	183 mm x 40 mm x 19 mm
Application requirements	
Supported operating systems	Windows 7, 8.1, 10 MacOS 10.12, 10.13, 10.14
Support for standard audio and video device drivers	UAC 1.0 Audio UVC 1.1/1.5Video HID 1.11
Power requirements	
12VDC/5A @ 100~240VAC	50/60 Hz
Camera	
Field of view	120 degrees
Capture resolution	UHD 2160p (4K)
People Framing & speaker tracking	Automatic
Electronic PTZ	5x Zoom
Camera presets	2
Audio	
Stereo microphones	6-element beamforming microphone array 12 ft pickup range 120 Hz–16 kHz frequency response
Stereo speakers	100 Hz–20 KHz frequency response Output = 90 dB @ 0.5m
Acoustic Clarity technology	Provides full-duplex conversations, acoustic echo cancellation and background noise suppression
Application compatibility	
Compatible with any application that supports standard USB audio and video drivers, including but not limited to:	Microsoft Teams and Skype for Business Zoom Certified LogMeIn GoToMeeting® BlueJeans Network Google Hangouts Amazon Chime Cisco Webex® VidyDesktop Polycom RealPresence Desktop



VCA®
ISO
9001

NEEM CONTACT MET ONS OP

Bel 038 - 420 90 90 of mail naar sales@limid.nl

 limid.nl | smartboard.nl






R30 Camera

Voor small rooms

All-in-one videobar	
Unit dimensions (W x H x D)	68 mm x 445 mm x 81 mm
Weight	822 g
Afstandbediening	183 mm x 40 mm x 19 mm
Application requirements	
Supported operating systems	Windows 8.1, 10, 11 MacOS 10.10 of hoger USB 3.0 required for 4K video
Power requirements	
External DC Power Supply	12V/3A
Camera	
Field of view	120 degrees
Capture resolution	UHD 2160p (4K), Full HD (1080p), HD (720p)
People Framing & speaker tracking	Automatic
Electronic zoom	5x
Audio	
Microphones	3-element beamforming microphone array 50 Hz–14 kHz frequency response
Speakers	100 Hz–20 KHz frequency response Output = 84 dB SPL @ 1000 Hz @ 1m
Acoustic Clarity technology	Poly Acoustic Clarity technology with advanced acoustic echo cancellation and background noise suppression
Application compatibility	
Compatible with any application that supports standard USB audio and video drivers, including but not limited to:	Microsoft Teams and Skype for Business Zoom Certified LogMeIn GoToMeeting® Google Meet certified peripheral BlueJeans Network Google Hangouts™ Amazon Chime Cisco Webex® VidyoDesktop™ Polycom RealPresence Desktop Certified Google Meet Room RingCentral StarLeaf Dialpad

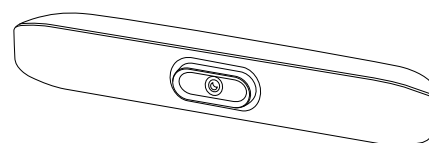

VRAGEN?

Bel 038 - 420 90 92 of mail naar info@smartboard.nl

 limid.nl | smartboard.nl

